


- Full BASIC Interpreter in ROM on a Single Chip
- BCD Floating Point Math
- Generates All Timing Necessary to Program EPROMS and E<sup>2</sup>PROMS
- Fast Tokenized Interpreter
- "Stand Alone" Software Development
- All Arithmetic and Utility Routines Can Be Called From Assembly Language
- Interrupts Can Be Handled By BASIC or Assembly Language
- Built-In Accurate REAL TIME CLOCK
- Multiple User Programs
- Programs May Reside in RAM, EPROM or E<sup>2</sup>PROM
- Built in Radix Conversion — Hex to Decimal and Decimal to Hex

8052AH-BASIC is an 8052AH microcontroller with a complete full-featured BASIC interpreter, MCS\* BASIC-52, resident in the 8K of available ROM. This Software-On-Silicon product is specifically designed to address the needs of process control, measurement, and instrumentation applications. MCS BASIC-52 allows 8052AH users to write programs in the popular BASIC language, which is much simpler to write and easier to understand than assembly language.

In addition to the standard BASIC commands and functions, such as floating point arithmetic and transcendental operations, MCS BASIC-52 contains many unique features that allow the user to perform tasks that usually require assembly language. Bit-wise logical operators, such as AND, OR, and EXCLUSIVE-OR are supported as well as hexadecimal arithmetic.

A minimum amount of hardware is required to support MCS BASIC-52. Small systems can be constructed with only a latch, 1K bytes of external memory, and the appropriate serial port drivers. With the addition of a transistor, a gate, and a couple of passive components, MCS BASIC-52 can program EPROM or E<sup>2</sup>PROM devices with the users application program. Both the standard and the intelligent Programming™ algorithms are supported.

MCS BASIC-52 is an interpreted language. This allows the user to develop a program interactively without the cumbersome and repetitive process of editing, assembling, loading, and running which is required by assemblers and compilers. MCS BASIC-52 was designed to permit the programmer to develop resident high level language software using the high performance 8052AH device.

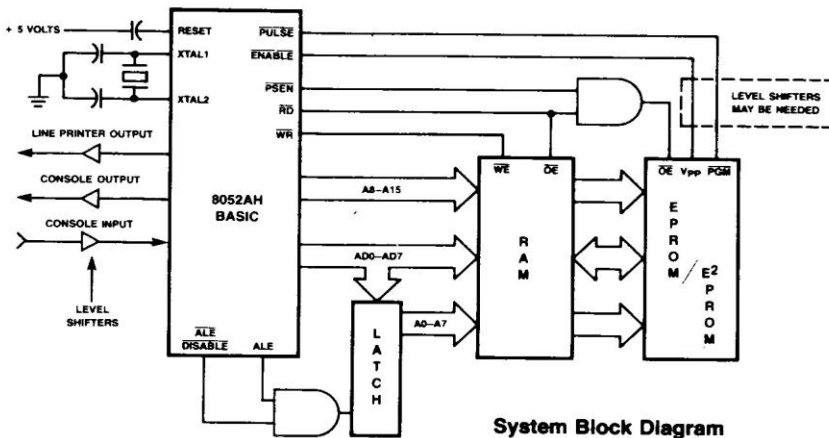

## FEATURES

### COMMAND SET

MCS BASIC-52 contains all standard BASIC commands, statements, and operators. Figure 1 lists the software feature set of MCS BASIC-52.

### DATA FORMAT

The range of numbers that can be represented in MCS BASIC-52 is:

$$\pm 1E-127 \text{ to } \pm .99999999E + 127$$

### CONTROL ORIENTED FEATURES

MCS BASIC-52 contains many unique features to perform tasks that usually require assembly language programming. The XBY and DBY operators can read and/or write external and internal memory respectively. The CBY operator is used to read program memory. Additionally, virtually all of the special function registers on the 8052AH can be accessed with MCS BASIC-52. This allows the user to set the timer or interrupt modes within the constructs of a BASIC program. An accurate interrupt driven REAL TIME CLOCK that has a 5 millisecond resolution is also implemented in MCS BASIC-52. This clock can be enabled, disabled, and used to generate interrupts. Finally, a CALL statement that allows the programmer to CALL assembly language routines is available in MCS BASIC-52. Parameters can be passed in a number of different ways.

### EPROM/E<sup>2</sup>PROM FILE

Most Basic interpreters allow only one program to be resident in memory, and many require that the program reside in RAM. MCS BASIC-52 allows programs to reside in both RAM and EPROM/E<sup>2</sup>PROM. Additionally, up to 255 programs may reside in EPROM/E<sup>2</sup>PROM. Programs may also be transferred (XFER) from EPROM/E<sup>2</sup>PROM to RAM for editing purposes.

### EPROM/E<sup>2</sup>PROM PROGRAMMING

A powerful feature of MCS BASIC-52 is that it generates all of the timing necessary to program any standard EPROM or E<sup>2</sup>PROM device with the user's program (PROG/FPROG). Additionally, very little external hardware is required to implement this feature. Saving programs in EPROM/E<sup>2</sup>PROM is much more attractive and reliable than other alternatives, such as cassette tape, especially in control and/or other noisy environments.

### AUTOSTART

After the user programs an EPROM or E<sup>2</sup>PROM with the desired BASIC program. The PROG2 or FPROG2 commands may be used to enable the unique AUTOSTART feature of MCS BASIC-52. When AUTOSTART is enabled, MCS BASIC-52 will execute the user program after RESET or a power-up condition. This permits the user to RUN a program without connecting the MCS BASIC-52 device to a console — a powerful feature for control environments.

### USER ACCESSABLE FUNCTION LIBRARY

Another unique feature of MCS BASIC-52 is that it contains a complete library of functions that can be accessed with assembly language. All floating point, radix conversion, and I/O routines contained in MCS BASIC-52 can be accessed with assembly language CALL instructions. These complex arithmetic routines can be used by the programmer in applications requiring the speed of assembly language, but also the complex arithmetics offered by BASIC.

### 8052AH-BASIC PIN DESCRIPTION (FIGURE 2)

8052AH-BASIC is an 8052AH device, however, MCS BASIC-52 assumes a particular hardware configuration. The following pin description outlines the pin functions defined by MCS BASIC-52.

#### VSS

Circuit ground potential.

#### VCC

Circuit supply voltage. 5 volts  $\pm$  10% relative to VSS.

#### AD0-AD7

The multiplexed low-order address and data bus used during accesses to external memory. External pullup devices ( $\sim$  10K  $\Omega$ ) are required on these pins if the MCS BASIC-52 EPROM/E<sup>2</sup>PROM programming feature is used.

#### A8-A15

The high order address bus used during accesses to external memory.

| Commands | Statements   | Operators            |
|----------|--------------|----------------------|
| RUN      | BAUD         | ADD (+)              |
| LIST     | CALL         | DIVIDE (/)           |
| LIST#    | CLEAR        | EXPONENTIATION (**)  |
| NEW      | CLEAR        | MULTIPLY (*)         |
| NULL     | CLEAR        | SUBTRACT (-)         |
| RAM      | CLOCK0       | LOGICAL AND (.AND.)  |
| ROM      | CLOCK1       | LOGICAL OR (.OR.)    |
| XFER     | DATA         | LOGICAL X-OR (.XOR.) |
| PROG     | READ         | LOGICAL NOT          |
| PROG1    | RESTORE      | ABS ( )              |
| PROG2    | DIM          | INT ( )              |
| FPROG    | DO-WHILE     | SGN ( )              |
| FPROG1   | DO-UNTIL     | SQR ( )              |
| FPROG2   | END          | RND                  |
|          | FOR-TO-STEP  | LOG ( )              |
|          | NEXT         | EXP ( )              |
|          | GOSUB        | SIN ( )              |
|          | RETURN       | COS ( )              |
|          | GOTO         | TAN ( )              |
|          | ON-GOTO      | ATN ( )              |
|          | ON-GOSUB     | =, >, >=, <, <=, <>  |
|          | IF-THEN-ELSE | ASC ( )              |
|          | INPUT        | CHR ( )              |
|          | LET          | CBY ( )              |
|          | ONERR        | DBY ( )              |
|          | ONEXT1       | XBY ( )              |
|          | ONTIME       | GET                  |
|          | PRINT        | IE                   |
|          | PRINT#       | IP                   |
|          | PH0.         | PORT1                |
|          | PH0.#        | PCON                 |
|          | PH1.         | RCAP2                |
|          | PH1.#        | T2CON                |
|          | PUSH         | TCON                 |
|          | POP          | TMOD                 |
|          | PWM          | TIME                 |
|          | REM          | TIMER0               |
|          | RET1         | TIMER1               |
|          | STOP         | TIMER2               |
|          | STRING       | TIME                 |
|          | UI0          | XTAL                 |
|          | UI1          | MTOP                 |
|          | UO0          | LEN                  |
|          | UO1          | FREE                 |
|          |              | PI                   |

Figure 1. MCS® BASIC-52 Software Feature Set

**PORT 1**

A general purpose quasi-bidirectional 8-bit input/output port. The individual pins on PORT 1 all have alternate functions which may or may not be implemented by the user. The alternate functions are as follows:

**PORT 1.0 (T2)**

Can be used as the trigger input to TIMER/COUNTER 2. A one (1) must be written to this port pin output latch in order for this function to operate. Details of

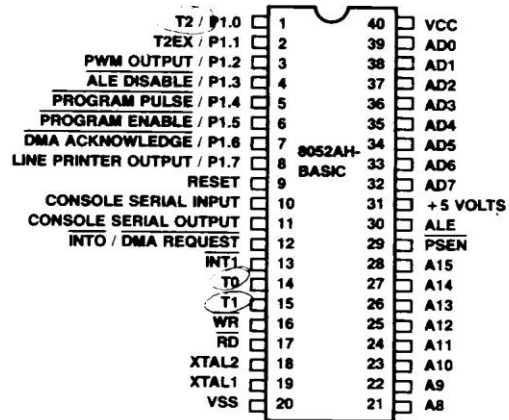


Figure 2. Configuration

the T2 trigger function are covered in the Microcontrollers Handbook. Order Number 210918-002.

**PORT 1.1 (T2EX)**

Can be used as the external input to TIMER/COUNTER 2. A one (1) must be written to this port pin output latch in order for this function to operate. Details of the T2 trigger function are covered in the Microcontroller Users Manual.

**PORT 1.2 (PWM OUTPUT)**

This pin is used as the PWM output port when the PWM statement is executed. PWM stands for Pulse Width Modulation and is used to generate pulses of varying duty cycle and frequency.

**PORT 1.3 (ALE DISABLE)**

This pin is used to disable the ALE signal to the external address latch when the EPROM/E<sup>2</sup>PROM programming feature is used. In a system, this pin is logically anded with ALE.

**PORT 1.4 (PROGRAMMING PULSE)**

When the EPROM/E<sup>2</sup>PROM programming feature is used, this pin provides the proper programming pulse width to program EPROM and INTELlIGENT EPROM™ devices. MCS BASIC-52 actually calculates the proper programming pulse width from the system crystal value (XTAL) to assure the proper timing of this pulse. When used to program E<sup>2</sup>PROM devices, the length of this pulse is not critical. This pin is active in the logical zero (0) state.

**PORT 1.5 (PROGRAMMING ENABLE)**

When the EPROM/E<sup>2</sup>PROM programming feature is implemented, this pin is used to enable the EPROM programming voltage. This pin remains active (logically low (0)) during the entire EPROM programming process. On E<sup>2</sup>PROM devices that do not require any special programming voltage, this pin is not used.

**PORT 1.6 (DMA ACKNOWLEDGE)**

When the DMA feature is implemented as described in the MCS<sup>®</sup> BASIC-52 users manual, this pin functions as an active low DMA ACKNOWLEDGE output.

**PORT 1.7 (LINE PRINTER OUTPUT)**

This pin functions as a serial output port when the LIST# or PRINT# command and/or statement is used. This enables the user to make a "hard copy" of a program or to print out results of a calculation.

**RESET**

A high (2.5 volts) on this pin for two machine cycles while the oscillator is running resets the device. An external pulldown resistor (~8.2K) from RESET to VSS permits power-on reset when a capacitor (~10 uf) is connected from this pin to VCC.

**ALE**

ALE (address latch enable) is an output pin that is used to latch the low order address byte during Read, Write, or program fetch operations to external memory.

**PSEN**

This pin (Program Store ENable) is a control signal that is used to enable external program memory. In MCS<sup>®</sup> BASIC-52, this pin will always remain inactive (logically high (1)) unless the user is running an assembly language program in external memory.

**XTAL1**

Input to the inverting amplifier that forms the oscillator.

**XTAL2**

Output of the inverting amplifier that forms the oscillator, and input to the internal clock generator. Receives the external oscillator signal when an external oscillator is used.

**RD**

A control signal that is used to enable READ operations to external data memory. This pin is active low (0).

**WR**

A control signal that is used to enable WRITE operations to external data memory. This pin is active low (0).

**T1**

This pin can be programmed to be an external input to TIMER/COUNTER 1.

**T0**

This pin can be programmed to be an external input to TIMER/COUNTER 0.

**INT1**

This pin is the external interrupt 1 pin. It is active low and interrupts on this pin may be handled in either BASIC or in assembly language.

**INT0/DMA REQUEST**

This is the external interrupt 0 pin. It is active low and may be optionally programmed to function as a DMA request input pin. The DMA REQUEST pin is used by E<sup>2</sup>PROM devices during programming.

**CONSOLE SERIAL OUTPUT**

This is the serial output pin to the console device. Standard ASCII codes are used as well as a standard asynchronous frame.

**CONSOLE SERIAL INPUT**

This is the serial input pin that receives data from the console device. Standard ASCII codes are assumed to be the input and the data is assumed to be transmitted using a standard asynchronous frame.

**NOTES**

If pin 31 is grounded the 8052AH-BASIC will operate as a standard 8032AH. The tolerances on this pin are described under DC characteristics.

For detailed information concerning this product please refer to the MCS BASIC-52 Users Manual (Order Number 210918-002).

**ABSOLUTE MAXIMUM RATINGS\***

Ambient Temperature Under Bias . . . 0°C to 70°C  
 Storage Temperature . . . . . -65°C to +150°C  
 Voltage on Any Pin With  
 Respect to Ground (V<sub>SS</sub>) . . . . -0.5V to +7V  
 Power Dissipation . . . . . 2 Watts

*\*NOTICE: Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.*

**DC CHARACTERISTICS** (T<sub>A</sub> = 0°C to 70°C, V<sub>CC</sub> = 4.5V to 5.5V, V<sub>SS</sub> = 0V)


| Symbol           | Parameter   | Min  | Max                   | Unit | Test Conditions                                    |
|------------------|---|------|-----------------------|------|--|
| V <sub>IL</sub>  | Input Low Voltage                                       | -0.5 | 0.8                   | V    |  |
| V <sub>IH</sub>  | Input High Voltage (Except RST and XTAL2)               | 2.0  | V <sub>CC</sub> + 0.5 | V    |  |
| V <sub>IH1</sub> | Input High Voltage to RST for Reset, XTAL2              | 2.5  | V <sub>CC</sub> + 0.5 | V    | XTAL1 to V <sub>SS</sub>                           |
| V <sub>OL</sub>  | Output Low Voltage Port 1, A8-15, Control Functions     |      | 0.45                  | V    | I <sub>OL</sub> = 1.6mA                            |
| V <sub>OL1</sub> | Output Low Voltage ALE, PSEN (Note 1)                   |      | 0.45                  | V    | I <sub>OL</sub> = 3.2mA                            |
| V <sub>OH</sub>  | Output High Voltage Port 1, A8-15, Control Functions    | 2.4  |                       | V    | I <sub>OH</sub> = -80µA                            |
| V <sub>OH1</sub> | Output High Voltage AD0-7, ALE, PSEN                    | 2.4  |                       | V    | I <sub>OH</sub> = -400µA                           |
| I <sub>IL</sub>  | Logical 0 Input Current Port 1, A8-15 Control Functions |      | -800                  | µA   | V <sub>in</sub> = 0.45V                            |
| I <sub>IL2</sub> | Logical 0 Input Current XTAL2                           |      | -2.5                  | mA   | XTAL1 at V <sub>SS</sub> , V <sub>in</sub> = 0.45V |
| I <sub>L1</sub>  | Input Leakage Current To AD0-7 EA                       |      | ±10                   | µA   | 0.45V < V <sub>in</sub> < V <sub>CC</sub>          |
| I <sub>IH1</sub> | Input High Current to RST/VPD For Reset                 |      | 500                   | µA   | V <sub>in</sub> = V <sub>CC</sub> - 1.5V           |
| I <sub>CC</sub>  | Power Supply Current                                    |      | 175                   | mA   | All outputs disconnected                           |
| C <sub>IO</sub>  | Capacitance of I/O Buffer                               |      | 10                    | pF   | f <sub>c</sub> = 1MHz, T <sub>A</sub> = 25°C       |

**Note 1:** Vol is degraded when the 8032AH/8052AH rapidly discharges external capacitance. This AC noise is most pronounced during emission of address data. When using external memory, locate the latch or buffer as close to the 8032AH/8052AH as possible.

| Datum      | Emitting Ports | Degraded I/O Lines         | VOL (peak) (max) |
|------------|----------------|----------------------------|------------------|
| Address    | A8-15, AD0-7   | P1, Control Functions      | 0.8V             |
| Write Data | AD0-7          | P1, Control Functions, ALE | 0.8v             |

**EXTERNAL CLOCK DRIVE CHARACTERISTICS (XTAL2)**


| Symbol | Parameter         | Variable Clock<br>f = 3.5 MHz to 12 MHz |     | Unit |
|--------|-------------------|---|-----|------|
|        |                   | Min                                     | Max |      |
| TCLCL  | Oscillator Period | 83.3                                    | 286 | ns   |
| TCHCX  | High Time         | 20                                      |     | ns   |
| TCLCX  | Low Time          | 20                                      |     | ns   |
| TCLCH  | Rise Time         |   | 20  | ns   |
| TCHCL  | Fall Time         |   | 20  | ns   |

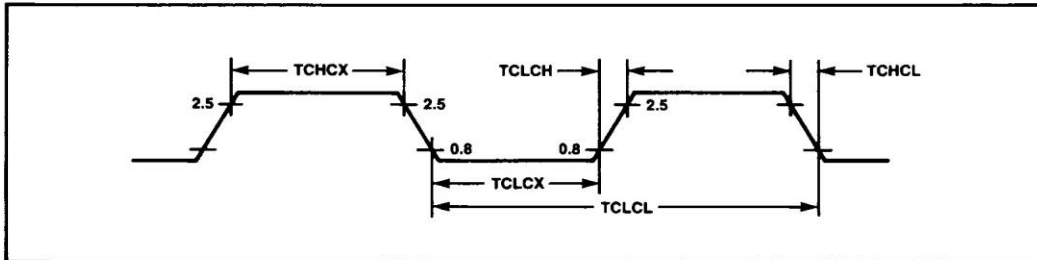


**A.C. CHARACTERISTICS:** ( $T_A = 0\text{ }^\circ\text{C}$  to  $+70\text{ }^\circ\text{C}$ ,  $V_{CC} = 5V \pm 10\%$ ,  $V_{SS} = 0V$ ,  
Load Capacitance for Port 0, ALE, and PSEN = 100 pF,  
Load Capacitance for All Other Outputs = 80 pF)

| Symbol  | Parameter                    | 12MHz Osc |     | Variable Oscillator |             | Units    |
|---------|------------------------------|-----------|-----|---------------------|-------------|----------|
|         |                              | Min       | Max | Min                 | Max         |          |
| 1/TCLCL | Oscillator Frequency         |           |     | 3.5                 | 12.         | MHz      |
| TLHLL   | ALE Pulse Width              | 127       |     | 2TCLCL-40           |             | ns       |
| TAVLL   | Address Valid to ALE Low     | 43        |     | TCLCL-40            |             | ns       |
| TLLAX   | Address Hold After ALE Low   | 48        |     | TCLCL-35            |             | ns       |
| TLLIV   | ALE Low to Valid Instr In    |           | 233 |                     | 4TCLCL-100  | ns       |
| TLLPL   | ALE Low to PSEN Low          | 58        |     | TCLCL-25            |             | ns       |
| TPLPH   | PSEN Pulse Width             | 215       |     | 3TCLCL-35           |             | ns       |
| TPLIV   | PSEN Low to Valid Instr In   |           | 125 |                     | 3TCLCL-125  | ns       |
| TPXIX   | Input Instr Hold After PSEN  | 0         |     | 0                   |             | ns       |
| TPXIZ   | Input Instr Float After PSEN |           | 63  |                     | TCLCL-20    | ns       |
| TPXAV   | PSEN to Address Valid        | 75        |     | TCLCL-8             |             | ns       |
| TAVIV   | Address to Valid Instr In    |           | 302 |                     | 5TCLCL-115  | ns       |
| TPLAZ   | PSEN Low to Address Float    |           | 20  |                     | 20          | ns       |
| TRLRH   | RD Pulse Width               | 400       |     | 6TCLCL-100          |             | ns       |
| TWLWH   | WR Pulse Width               | 400       |     | 6TCLCL-100          |             | ns       |
| TRLDV   | RD Low to Valid Data In      |           | 252 |                     | 5TCLCL-165  | ns       |
| TRHDX   | Data Hold After RD           | 0         |     | 0                   |             | ns       |
| TRHDZ   | Data Float After RD          |           | 97  |                     | 2TCLCL-70   | ns       |
| TLLDV   | ALE Low to Valid Data In     |           | 517 |                     | 8TCLCL-150  | ns       |
| TAVDV   | Address to Valid Data In     |           | 585 |                     | 9TCLCL-165  | ns       |
| TLLWL   | ALE Low to RD or WR Low      | 200       | 300 | 3TCLCL-50           | 3TCLCL + 50 | ns       |
| TAVWL   | Address to RD or WR Low      | 203       |     | 4TCLCL-130          |             | ns       |
| TQVWX   | Data Valid to WR Transition  | 23        |     | TCLCL-60            |             | ns<br>ns |
| TQVWH   | Data Valid to WR High        | 433       |     | 7TCLCL-150          |             | ns       |
| TWHQX   | Data Held After WR           | 33        |     | TCLCL-50            |             | ns       |
| TRLAZ   | RD Low to Address Float      |           | 20  |                     | 20          | ns       |
| TWHLH   | RD or WR High to ALE High    | 43        | 123 | TCLCL-40            | TCLCL + 40  | ns       |

AC TIMING DIAGRAMS

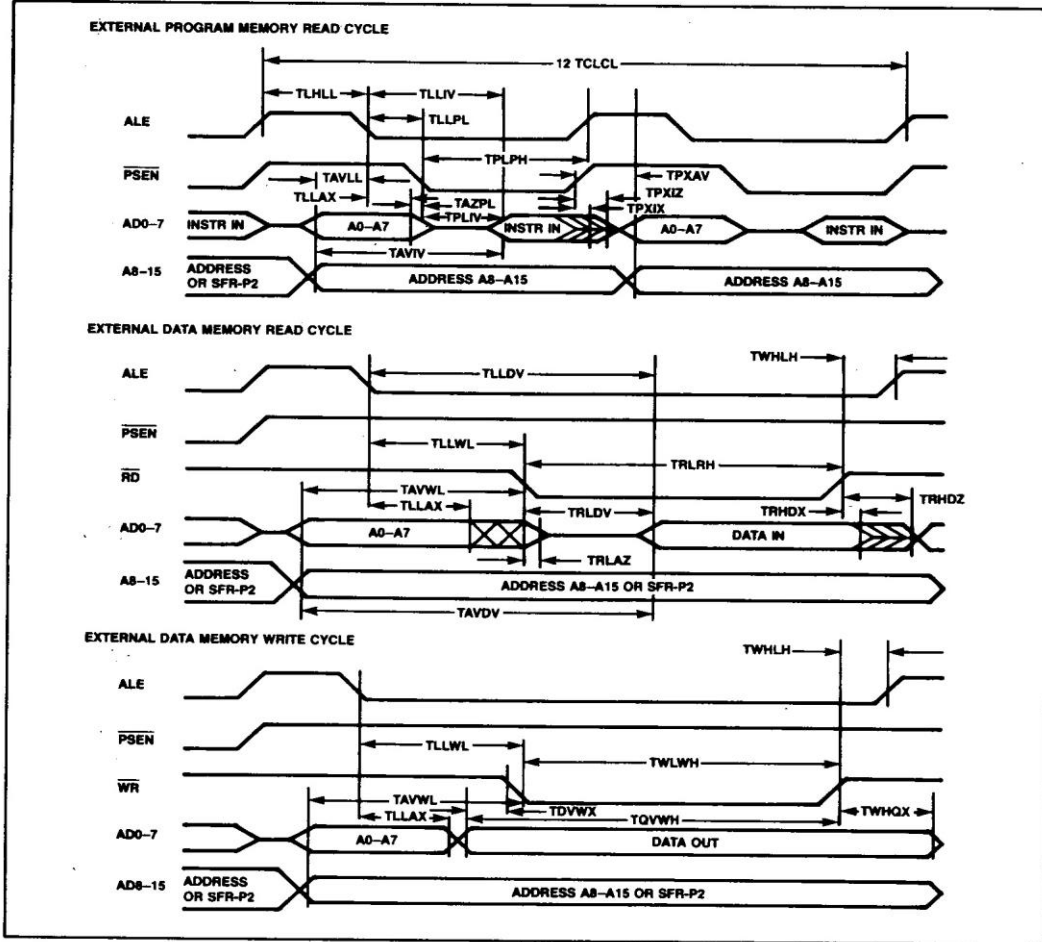


AC TESTING INPUT/OUTPUT, FLOAT WAVEFORMS

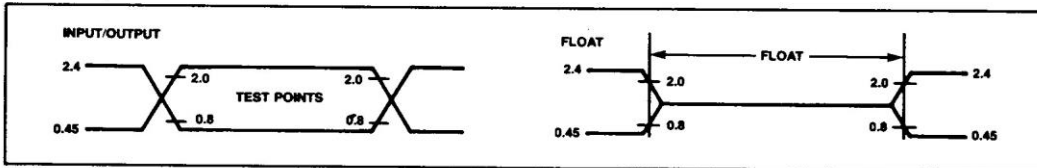

AC inputs during testing are driven at 2.4V for a logic "1" and 0.45V for a logic "0". Timing measurements are made at 2.0V for a logic "1" and 0.8V for a logic "0". For timing purposes, the float state is defined as the point at which an ADO-7 pin sinks 2.4mA or sources 400µA at the voltage test levels.



CLOCK WAVEFORMS

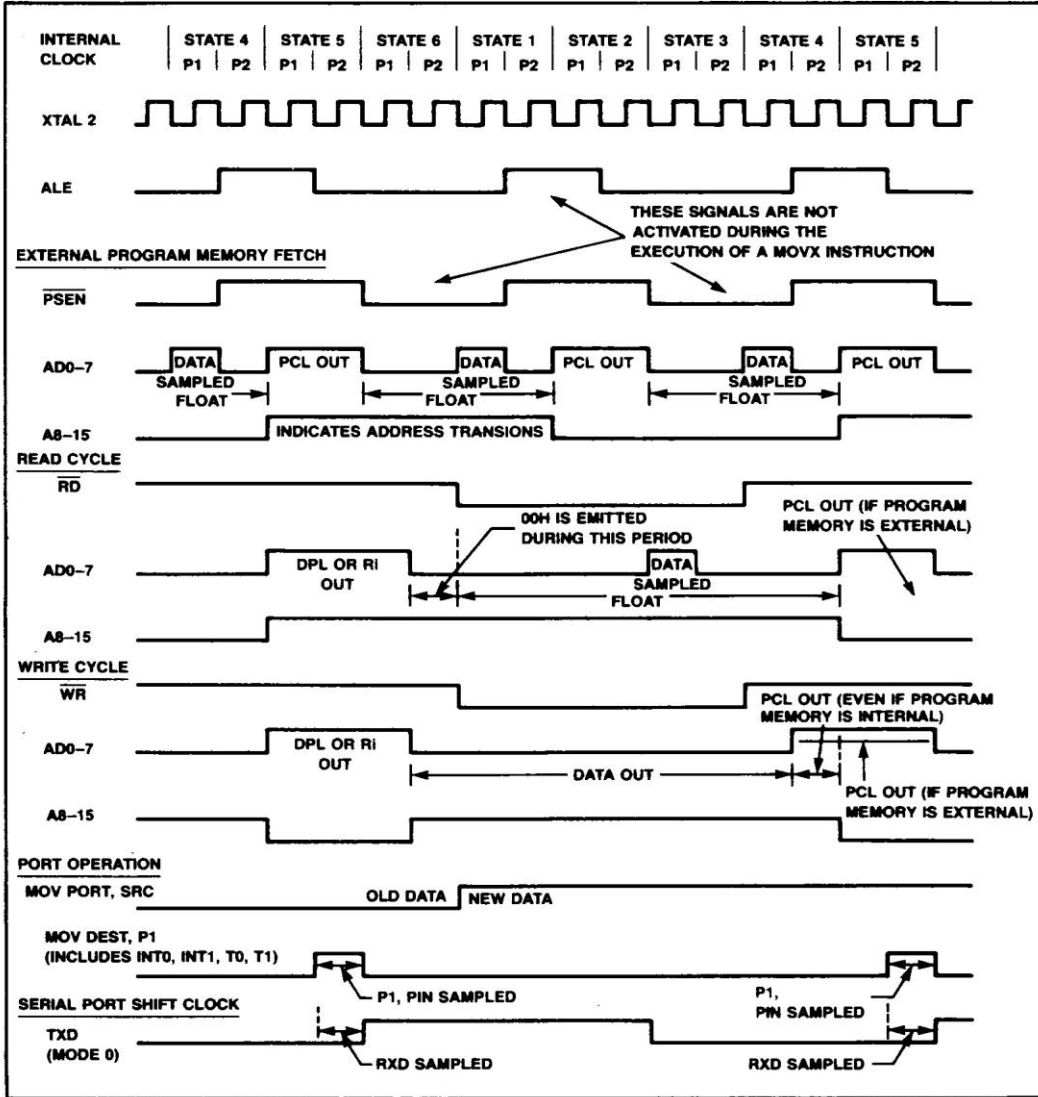

This diagram indicates when signals are clocked internally. The time it takes the signals to propagate to the pins, however, ranges from 25 to 125 ns. This propagation delay is dependent on variables such as temperature and pin loading. Propagation also varies from output to output and component to component. Typically though, ( $T_A = 25^\circ\text{C}$ , fully loaded) RD and WR propagation delays are approximately 50 ns. The other signals are typically 85 ns. Propagation delays are incorporated in the AC specifications.